


Aluzinc's two metallic constituents create a corrosion resistance barrier effect - the aluminium present on the surface of the coating along with the sacrificial protection of zinc. The 55% aluminium, 43.4% zinc and 1.6% silicon double sided coating is applied in a continuous hot dip galvanising process that creates the attractive characteristic spangled silver finish, a thin layer of aluminium oxide which forms on the top surface preserves the appearance for many years. The zinc in the coating provides 'self-healing' sacrificial cathodic protection whenever the steel substrate is exposed.

Petrochem Aluzinc has been independently Fire Tested to demonstrate that correctly fitted jacketing will withstand a typical hydrocarbon fire....during the 30 minute test Petrochem Dobelshield® cladding remained intact, protecting the insulation and pipework at 1200°C.

SSAB's UK Service Centre in the heart of the West Midlands houses our cut-to length line, to complement the cut length facility the factory also offers a fully integrated slitting service, slitting to width from master coils can be accommodated from 1250mm wide down to just 10mm within .5mm tolerance and in thicknesses from 0.4mm to 0.8mm.

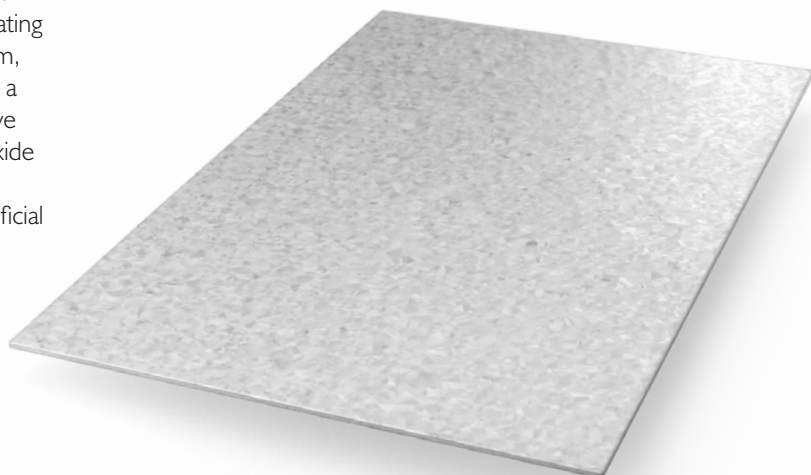

DESCRIPTION	EN 10346:2015 - Hot Dip, Double-Sided Coated Steel						
PROPERTIES	<p>Excellent corrosion resistance - <i>the zinc in the coating provides 'self-healing' sacrificial cathodic protection whenever the steel substrate is exposed (e.g. by accidental cuts or scratches).</i></p> <p>Excellent fire resistance without toxic fumes - <i>tested to over 1200°C</i></p> <p>Attractive appearance - <i>bright 'Spangle' finish with anti fingerprint coating (1 micron).</i></p> <p>Excellent thermal and light reflectivity.</p> <p>Good abrasion resistance.</p>						
COATING ANALYSIS	<p>185 g/m² - Coated both sides.</p> <p>Approx 25 microns thick.</p> <table border="0"> <tr> <td>Aluminium</td> <td>55%</td> </tr> <tr> <td>Zinc</td> <td>43.1%</td> </tr> <tr> <td>Silicon</td> <td>1.6%</td> </tr> </table>	Aluminium	55%	Zinc	43.1%	Silicon	1.6%
Aluminium	55%						
Zinc	43.1%						
Silicon	1.6%						
MECHANICAL PROPERTIES	<p>Thicknesses available 0.4, 0.5, 0.6, 0.7, 0.8mm</p> <p>Width 1000mm (with 1250mm available to order)</p> <p>Cut sheets from 0.5 metres long to 5 metres long</p> <p>Manufactured to ISO 9001 Quality Assurance Standard Certificate No.FQA0936907</p> <p>Distributed to BS EN ISO 9002 Quality Assurance Standard. Certificate No.890916.</p> <p>Material can be recoiled to measured length.</p>						



The performances indicated are averages and may vary in particular according to the type of support used. These data are not contractual and may be amended in line with technological progress relating to the product.

SSAB Swedish Steel Ltd. Narrowboat Way, Hurst Business Park, Brierley Hill. West Midlands. DY5 1UF

www.aluzinc.co.uk email:info@aluzinc.co.uk Tel: +44 (0)1384 74660

ref:ssab-petrochem-aluzinc-18